



## Features:

- 4 Digit, 7 segment LED
- 0.01 Resolution

Size: 72mm x 72mm

Certifications:

## Technical Specifications

### Display

Display	7 segment LED Display
Digit	4
Digit Height	0.56" (14.2mm)

### Input Specifications

Electrical Connection	1Ø - 2 wire
Input Voltage Range	Self Powered
Measurement Range	45.00 - 65.00 Hz
Resolution	0.01
Accuracy	± 0.05 Hz
Over Range Indication	"Ovfr" (Over 65.00 Hz)
Under Range Indication	"Ur" (Under 45.00 Hz)

### Supply Specifications

Auxiliary Supply	240V AC ±20%, (45 - 65Hz)
------------------	---------------------------


### Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: 0 to 70°C (32 to 158°F)
Humidity (non-condensing)	Upto 85% RH

### Mechanical Specifications

Mounting	Panel mount
Weight	190 gms
Protection Level	IP65 for faceplate

### Dimensions

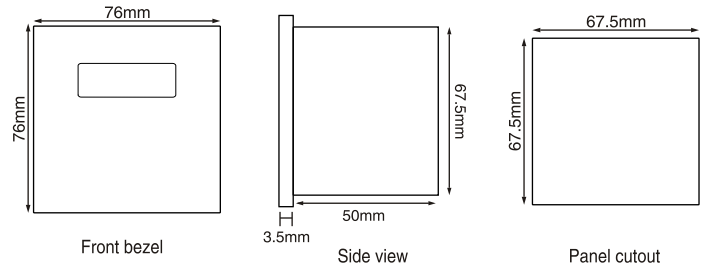

### Terminal Connections

<table border="1"> <tr> <td>N</td> <td>L</td> </tr> <tr> <td>1</td> <td>2</td> </tr> </table>	N	L	1	2
N	L			
1	2			
Cable Size (AWG): 20 to 14 ; Tightening Torque (Lb-inch): 6.018 to 6.992				
Cable Size (mm²): 0.5 to 2.5 ; Tightening Torque (N-m): 0.68 to 0.79				

## Ordering Information

Part No.	Supply Voltage
	240V AC
MF216	■