



## Features:

- 4 Digit, 7 segment LED
- 0.001 Resolution

Size: 1/8 DIN 48mm x 96mm

Certifications:  

## Technical Specifications

### Display

Display	7 segment LED Display
Digit	4
Digit Height	0.56" (14.2mm)

### Input Specifications

Electrical Connection	1Ø - 2 wire
Measurement Range	0.250 - 6A (AC)
Over Voltage	1.5 x Vn continuous, 2 x Vn (3s)
Frequency	50 / 60 Hz
Resolution	0.001
Accuracy	± 0.5% (± 1 digit)

### Supply Specifications

Auxiliary Supply	240V AC ±20%, ( 50 / 60Hz) 110V AC ±20%, ( 50 / 60Hz)
------------------	--


### Environmental Specifications

Temperature	Operating: -10 to +55°C (14 to 131°F) Storage: -20 to +75°C (-4 to 167°F)
Humidity (non-condensing)	Upto 85% RH


### Mechanical Specifications

Mounting	Panel mount
Weight	170 g (0.374 lbs)
Protection Level	IP65 for faceplate

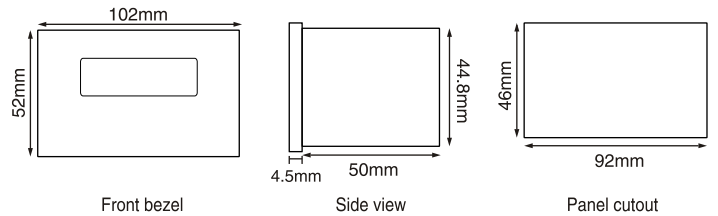

### Dimensions

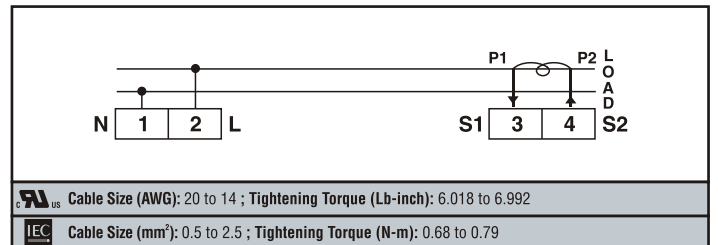

### Terminal Connections



## Ordering Information

Part No.	Supply Voltage		Certification	
	110V AC	240V AC		
MP14		■		
MP14-CU		■	■	■
MP14-110V	■			
MP14-110V-CU	■		■	■